



VIS-NIR定焦镜头 601002

2/3" C M-Iris

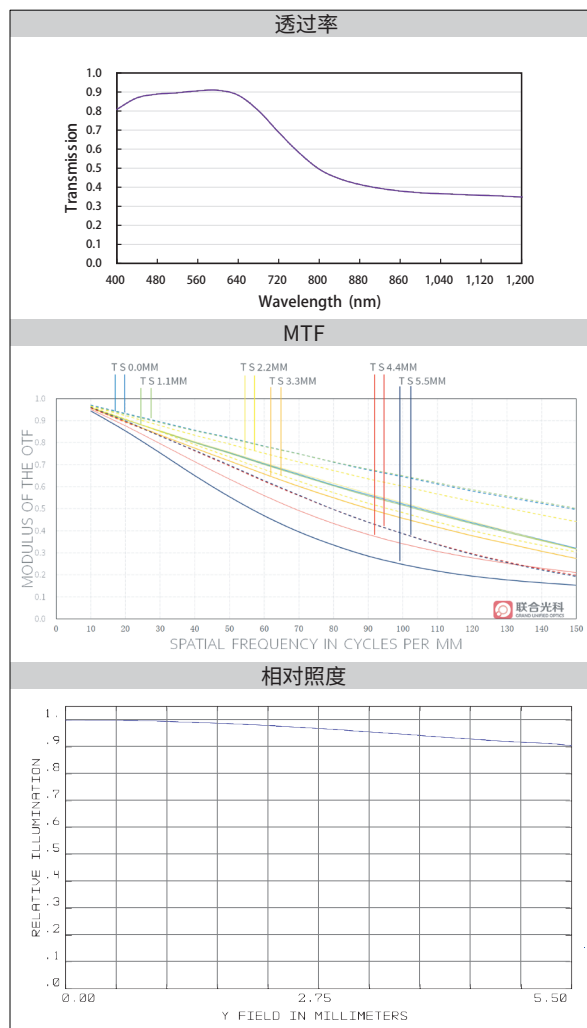

No	项目	规格
1	最大传感器尺寸	2/3"(11mm)
2	焦距	16mm
3	接口	C-Mount
4	F/#	F1.8-F16
5	工作距离	0.2m~∞
6	视场角(对角×水平×垂直)	2/3" 38°×29.6°×25.1°
7	后焦距(in air)	11.2mm
8	操作方式	对焦 手动 光圈 手动
9	TV畸变	2/3" 0.15%
10	滤镜尺寸	M25.5×0.5mm
11	镜头尺寸	D29.5×39.7mm
12	重量	50g
13	工作温度	-10°C~+50°C
14	放大倍率	-0.0764

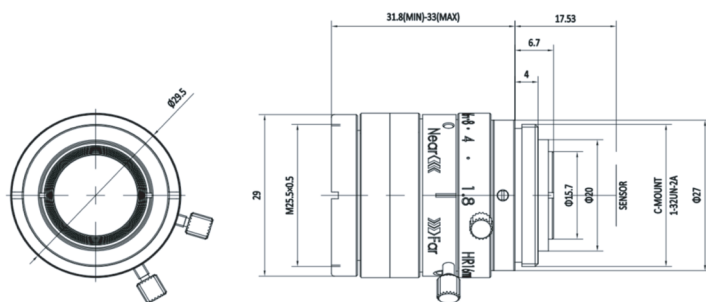

工作距离	放大倍数	接圈厚度	视野范围 (MM)					
			2/3" (8.45mm×7.07mm)		1/1.8" (7.38mm×4.92mm)		1/2" (6.22mm×4.67mm)	
			H	V	H	V	H	V
25mm	-0.4657	7mm	18.14	15.18	15.85	10.56	13.36	10.03
50mm	-0.2698	5mm	31.32	26.20	27.35	18.24	23.05	17.31
75mm	-0.1896	5mm	44.57	37.29	38.92	25.95	32.81	24.63
100mm	-0.1463	2mm	57.76	48.33	50.44	33.63	42.52	31.92
150mm	-0.1003	1mm	84.25	70.49	73.58	49.05	62.01	46.56
200mm	-0.0764		110.60	92.54	96.60	64.40	81.41	61.13
250mm	-0.0617		136.95	114.59	119.61	79.74	100.81	75.69
300mm	-0.0517		163.44	136.75	142.75	95.16	120.31	90.33
350mm	-0.0445		189.89	158.88	165.84	110.56	139.78	104.94
400mm	-0.0391		216.11	180.82	188.75	125.83	159.08	119.44
450mm	-0.0348		242.82	203.16	212.07	141.38	178.74	134.20
500mm	-0.0314		269.11	225.16	235.03	156.69	198.09	148.73
550mm	-0.0286		295.45	247.20	258.04	172.03	217.48	163.29
600mm	-0.0262		322.52	269.85	281.68	187.79	237.40	178.24
700mm	-0.0225		375.56	314.22	328.00	218.67	276.44	207.56
800mm	-0.0198		426.77	357.07	372.73	248.48	314.14	235.86
900mm	-0.0176		480.11	401.70	419.32	279.55	353.41	265.34
1000mm	-0.0158		534.81	447.47	467.09	311.39	393.67	295.57

